

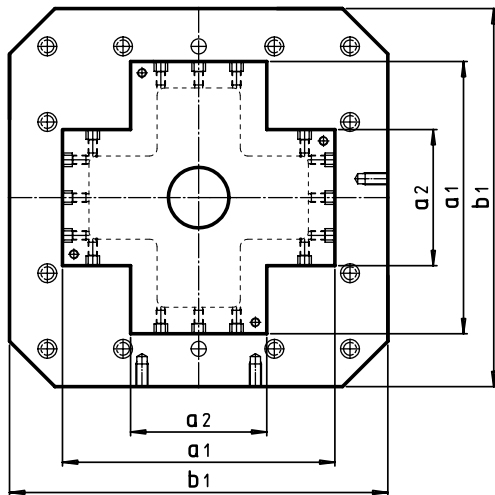


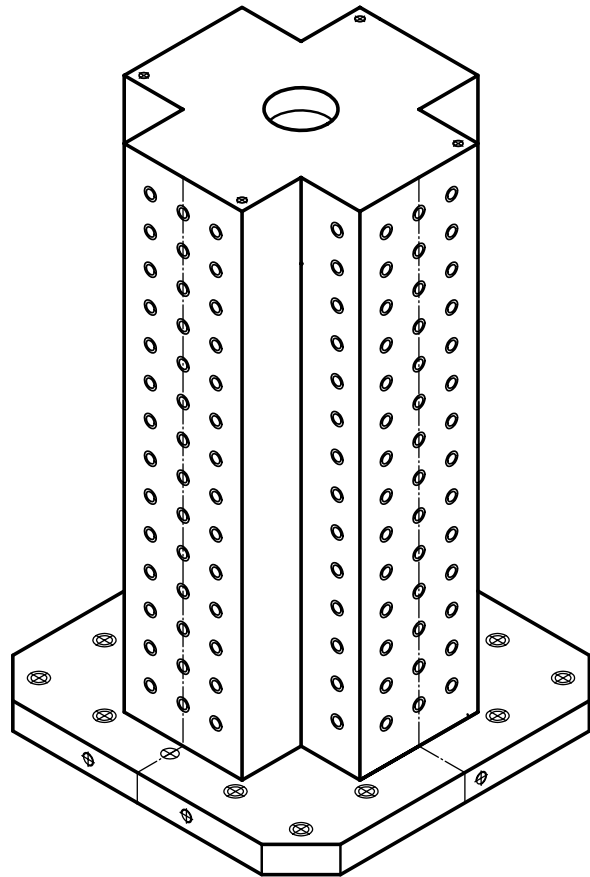

torri bivalenti a croce, per serraggi multipli

cross bivalent towers
tours bivalents à croix
Kreuzturm mit Vollraster

06

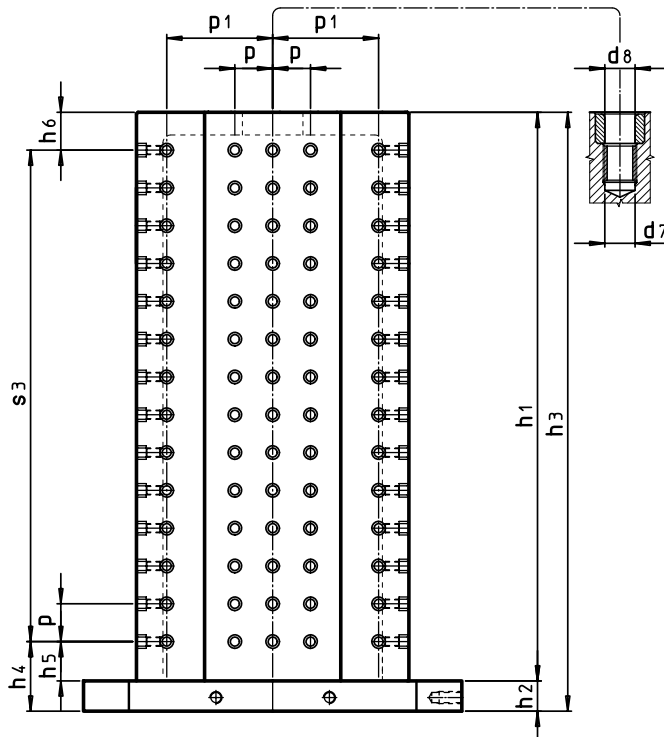

codice-code	a1	a2	h1	h2	h3	b1	d8	d7	p	h4	p1	s3	h5	h6	guide - rails	.GG	.AL
code-Best.Nr.	±0.015					stand.	F7		±0.01	±0.015	±0.01				rails-Schienen	kg	kg
062.010	360	180	652	40	692	500	12	M12	50	92	140	550	52	50	l=650 max	260	95
062.020	360	180	752	40	792	630	12	M12	50	92	140	650	52	50	l=750 max	300	110

indicare con la richiesta le caratteristiche di interfacciamento alla macchina - on the request put the interface features to the machine
il faut indiquer dans votre demande les caractéristiques d'interface à la machine - bei Anfrage bitte Info über die Palettenschnittstelle