




torri bivalenti ad otto facce, per serraggi multipli

eight faces bivalent towers
tours bivalents à huit faces
acht-gesichte zweiseitige Spannturm

06

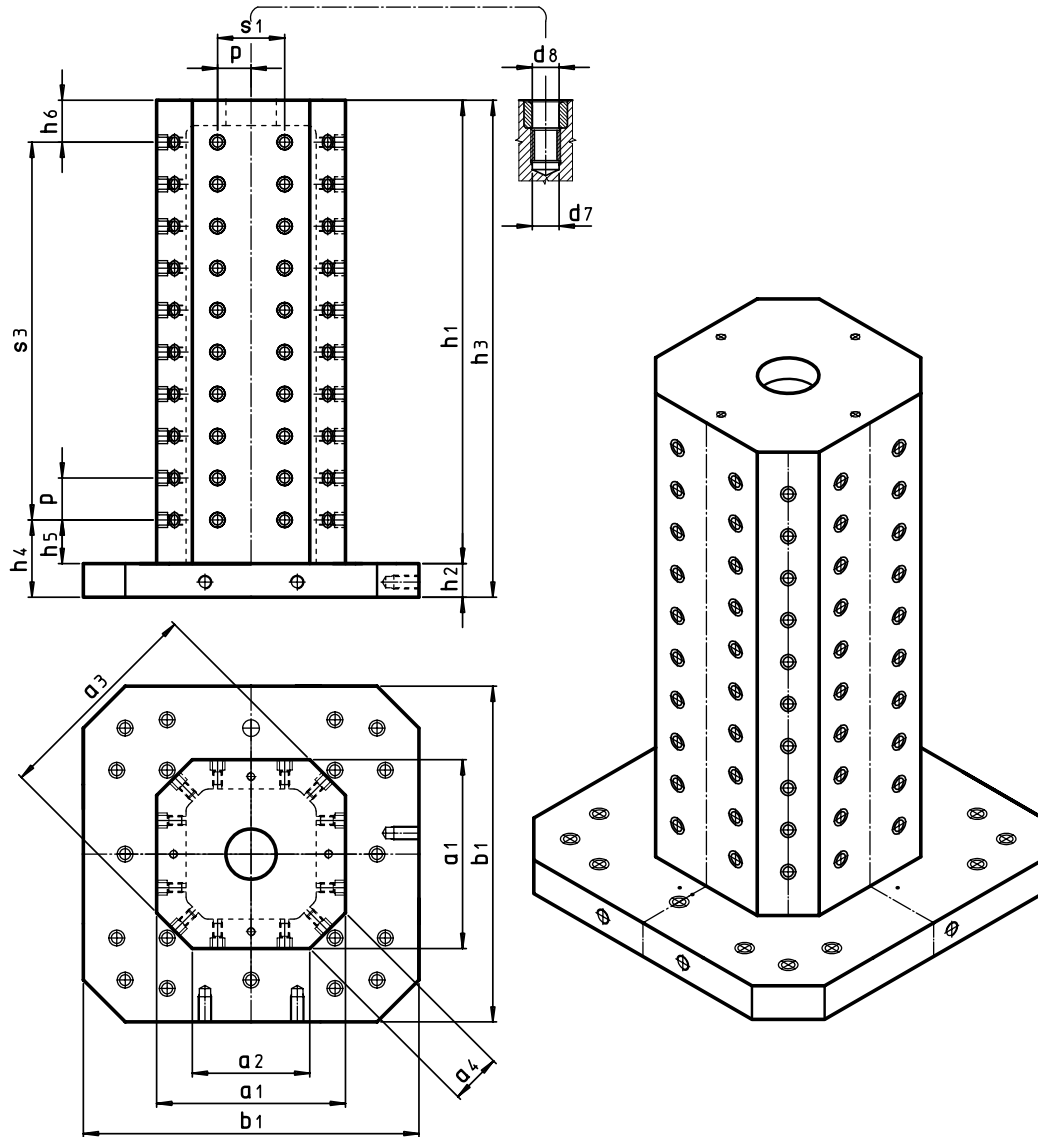

codice-code	a1	a2	a3	a4	h1	h2	h3	b1	d8	d7	p	h4	s1	s3	h5	h6	guide - rails	.GG	.AL
code-Best.Nr.	±0.015	nom.	±0.015	nom.				stand.	F7		±0.01	±0.015					rails-Schien.	kg	kg
063.010	225	140	258	60	552	40	592	320	12	M12	50	92	100	450	52	50	l=550 max	145	50
063.020	225	140	258	60	652	40	692	400	12	M12	50	92	100	550	52	50	l=650 max	180	62

indicare con la richiesta le caratteristiche di interfacciamento alla macchina - on the request put the interface features to the machine
il faut indiquer dans votre demande les caractéristiques d'interface à la machine - bei Anfrage bitte Info über die Palettenschnittstelle